

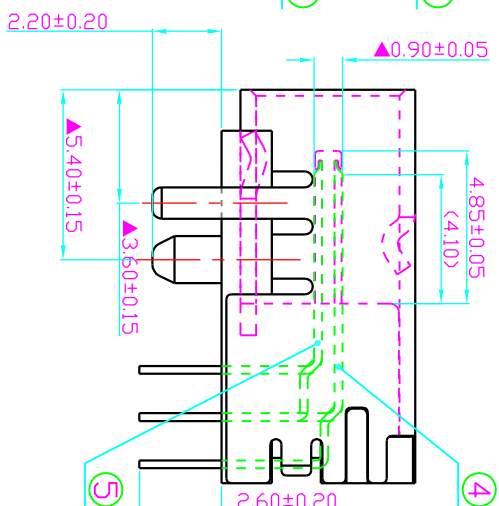
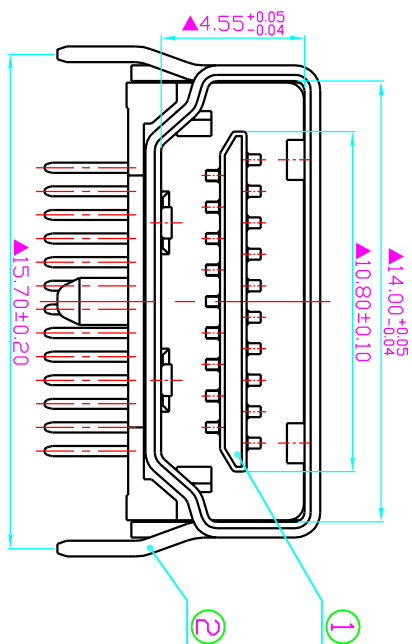
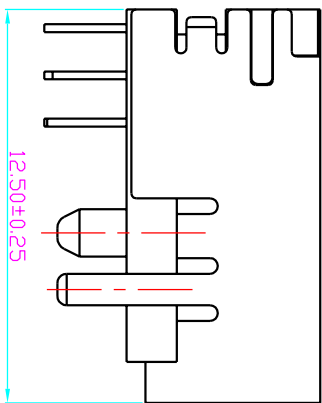
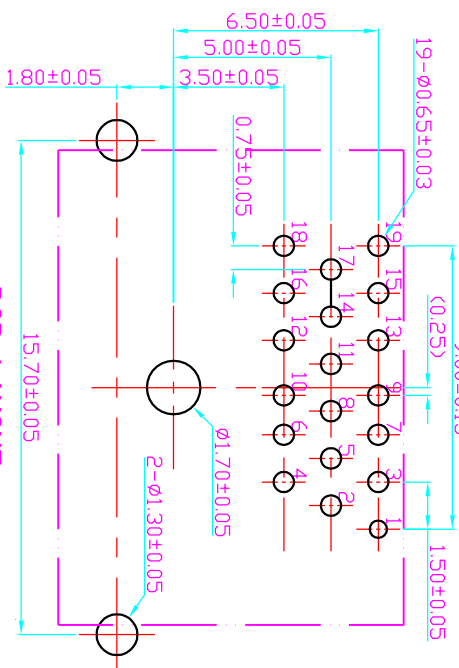
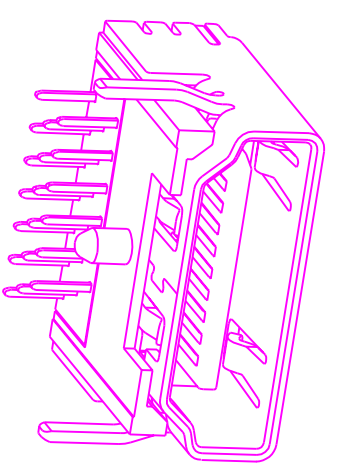


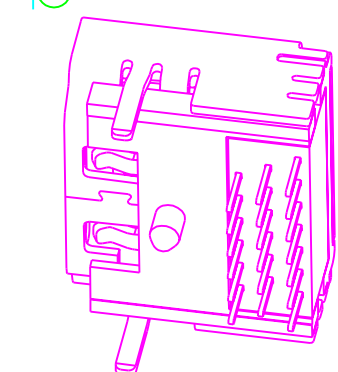

- 技术要求:
- 电气特性:
 - 1-1 额定电压: 电流: DC 40V, 0.5A
 - 1-2 接触阻抗: 30mΩ MAX
 - 1-3 耐电压: AC500V/60Hz 1min
 - 1-4 绝缘阻抗: 未连接插头前 500VDC, 100MΩ MIN; 连接插头后 150VDC, 10MΩ MIN
 - 机械特性:
 - 2-1 插入力: 44.1N MAX
 - 2-1 拔出力: 2000次后 9.8N TO 39.2N, 10000次后 4.9N TO 39.2N
 - 2-2 机械寿命: 10000 cycles
 - 环境特性:
 - 3-1 适用温度范围: -20℃ TO +85℃
 - 3-2 湿度范围: 95%RH MAX
 - 耐焊性: 260±3℃, 5±1s
 - 其它特性: 见规格说明书

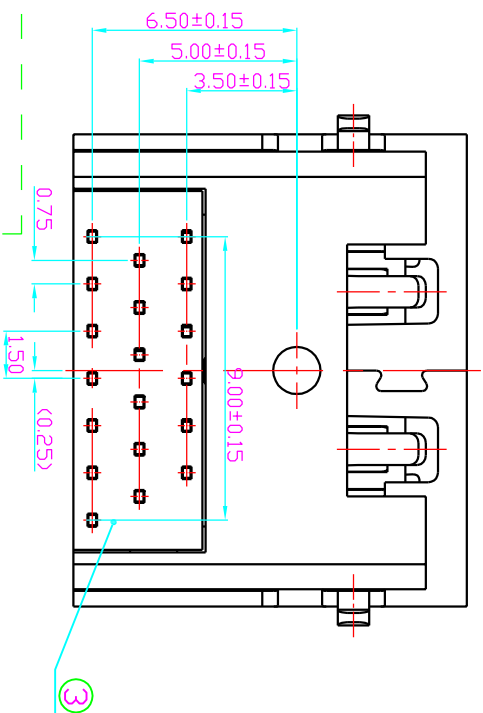

PCB LAYOUT

5	接触端子短	HDMIFA4E-05-M24D00-01	9	磷铜	借用HDMIFA4E1-01
4	接触端子长	HDMIFA4E-04-M24D00-01	10	磷铜	借用HDMIFA4E1-01
3	后盖	HDMIFA4E-03-P01A02-01	1	LCP	借用HDMIFA4E1-01
2	外壳(F)	HDMIFA4E-02-M23C00-01	1	H65	底层: Cu 表层: Ni
1	基座	HDMIFA4E-01-P01A02-01	1	LCP	借用HDMIFA4E1-01

钻宝电子有限公司

数量	更改单号	签名	日期	一股公差
				X. ±0.4
				X. ±0.30
				.XX ±0.20
				X° ±2°
				.X° ±1.5°

绘图	审核	核准	机种	HDMI连接器
			成品名称	HDMI-19WS01
			成品料号	